




Product Specification

Central Diesel provides these specifications as a courtesy and are a guide only. They have been sourced from the manufacturer and may change without notice. Central Diesel accepts no responsibility for any errors or omissions.

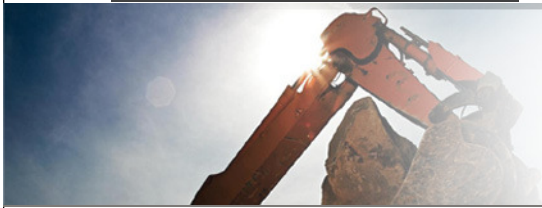

L 2011
The construction equipment engine
12 - 58,1 kW / 16 - 78 hp

These are the characteristics of the L 2011:

- 2-, 3- and 4-cylinder naturally aspirated in-line engines.
- 3- and 4-cylinder engines also turbocharged.
- Integrated cooling system (engine is supplied complete with heat exchanger).
- Cooling and lubrication with oil.
- 14% more power output in comparison to the successor 1011F.
- 100% extended belt change interval.
- PTO for hydraulic pump drive is increased by 55%.
- All service points on one engine side.
- Compact engine design.



[Partner Search](#)

[Data Sheet in PDF-Format](#)

≤ Searchresult **4** from **43** Engines ≥



PRODUCT SEARCH	<input checked="" type="checkbox"/> All Products
Market Segments	<input type="checkbox"/> Mobile Machinery <input type="checkbox"/> Gen Sets <input type="checkbox"/> Agricultural Machinery <input type="checkbox"/> Automotive <input type="checkbox"/> Marine
Power range kW/hp	<input type="checkbox"/> 0-50 / 0-67 <input type="checkbox"/> 50-100 / 67 - 134 <input type="checkbox"/> 100-500 / 134-670 <input type="checkbox"/> 500-1.000 / 670-1.341
Cooling	<input type="checkbox"/> Air-cooling <input type="checkbox"/> Water-cooling <input type="checkbox"/> Oil-cooling

[Back to Selection](#)

[Back to Overview](#)